




Ice Maker: IM-240DNE(-23) (-32) / IM-240XNE(-23) (-32) IM-240DWNE / IM-240XWNE



Product Description

The IM-240D(W)NE is modular ice maker which has a production capacity of 240 kg per 24 hours. One of the key features is that it can be stacked on one or two IM-240X(W)NE's, increasing the production capacity to either 480 kg or 720 kg per 24 hours.

- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process.
- Hoshizaki ice makers are micro computer controlled, controlling the ice making process to perform at its best under varying circumstances, without having to make physical adjustments.
- A stainless steel exterior provides a hygienic and high quality finish.
- Foam injected polyurethane for insulation (HFC free), helps preserve the quality and consistency of the ice produced, reducing the number of production cycles.
- An easily cleanable air filter allows end users to carry out a routine cleaning schedule, extending product life expectancy and reducing the frequency and costs of maintenance call-outs.



Ice Type: Cube

IM-240DNE / XNE / DWNE / XWNE
Ice Size: Standard (L) 28 x 28 x 32mm

IM240DNE-23 / XNE-23
Ice Size: Medium 28 x 28 x 23mm

IM-240NE-32 / XNE-32
Ice Size: Extra Large 32 x 32 x 32mm

Available Models

Model	Air Cooled	Water Cooled
IM-240DNE	✓	
IM-240DNE-23	✓	
IM-240DNE-32	✓	
IM-240XNE	✓	
IM-240XNE-23	✓	
IM-240XNE-32	✓	
IM-240DWNE		✓
IM-240XWNE		✓

Ice Production

Ice Production per 24h (Approx.)		Temperature	Ice Production per Cycle (Approx.)	Water Consumption per 24h (Approx.)
Dimple 5mm	Dimple 15mm			
230kg 220kg 200kg	240kg 230kg 210kg	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	3.2kg / 140 pcs	0,76m ³ 0,38m ³ 0,35m ³
230kg 215kg 205kg	240kg 225kg 215kg	AT.10°C, WT.10°C AT.21°C, WT.15°C AT.32°C, WT.21°C	3.2kg / 140 pcs	0,76m ³ 0,37m ³ 0,36m ³

For more information visit our website
www.hoshizaki-europe.com


Hoshizaki Europe B.V. retains the right to change products and their specifications without prior notice.






Ice Maker: IM-240DNE(-23) (-32) / IM-240XNE(-23) (-32) IM-240DWNE / IM-240XWNE

IM-240DNE / XNE / 23 / 32

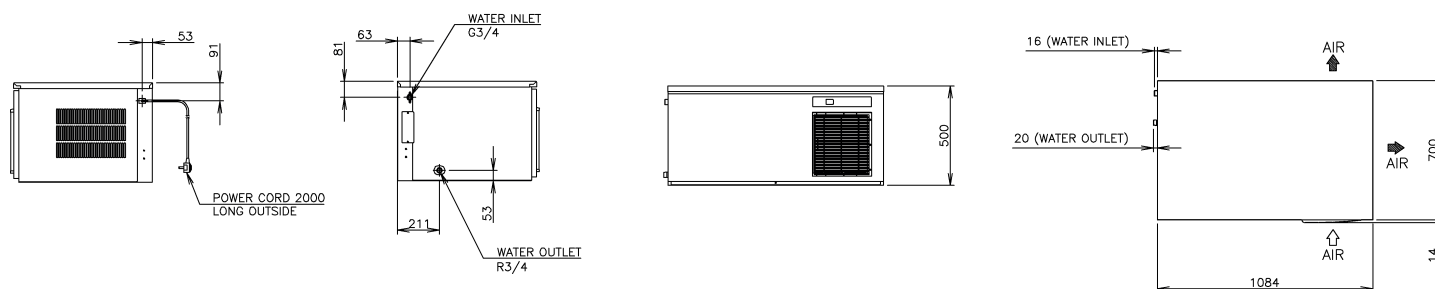

IM-240DWNE / XWNE

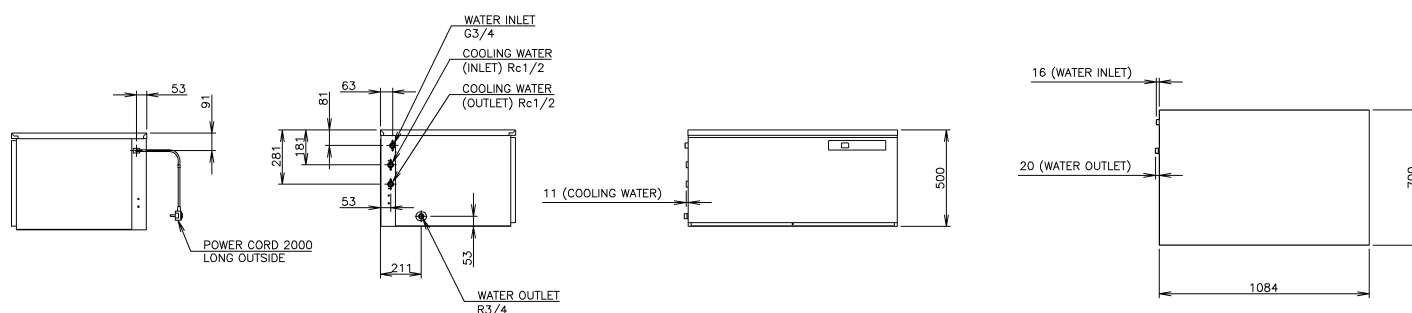

Full CAD specification drawings available on website

Specifications

Specification	IM-240DNE (XNE) (23) (32)	IM-240DWNE (XWNE)
Dimensions W x D x H (mm)	1084 x 700 x 500	1084 x 700 x 500
AC Supply Voltage	1 Phase 220 - 240V 50Hz	1 Phase 220 - 240V 50Hz
Electric Consumption (AT.32°C, WT.21°C)	1330W	1330W
Insulation	Polyurethane Foam	Polyurethane Foam
Heat Rejection	2870W	2850W
Refrigerant	R404A	R404A
Weight Gross / Net (kg)	106 / 88	105 / 87

Corresponding Bins

Models
B-801SA, Top Kit IMD
Accessories
Scoop, Installation Kit, Brace



HOSHIZAKI

Export Office

Burgemeester Stramanweg 101,
1101 AA Amsterdam
The Netherlands

T: +31 (0)20 691 8499
F: +31 (0)20 691 8768
sales@hoshizaki.nl
www.hoshizaki-europe.com

T: +44 (0)132 261 6900
F: +44 (0)132 261 6901
info@gramuk.co.uk
www.gramuk.co.uk