



**HOSHIZAKI**

> **IM-240NE**  
> **IM-240NE-21**  
> **IM-240NE-23**

daily ice production capacity of up to 240kg



Cube ice is perfectly symmetrical and leaves a good impression with its hard, crystal clear quality that melts very slowly; allowing customers to enjoy their favourite drink longer. The IM series allows more flexibility of application with each range offering ice in variable sizes alongside a design for uncomplicated usage from start to finish.



> **IM-240NE**


CUBE ICE MAKER SERIES

## FEATURES


- > smart computer board technology
- > slide-in air filter for easy cleaning
- > stainless steel exterior




### UNIQUE ICE PRODUCTION SYSTEM

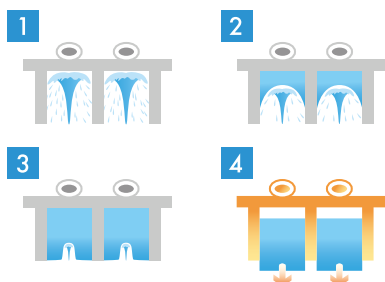


### ICE SIZE



**IM-240NE**



**IM-240NE-21**




**IM-240NE-23**




# DIMENSIONS & SPECIFICATION

## CUBE ICE MAKER AIR SYSTEM

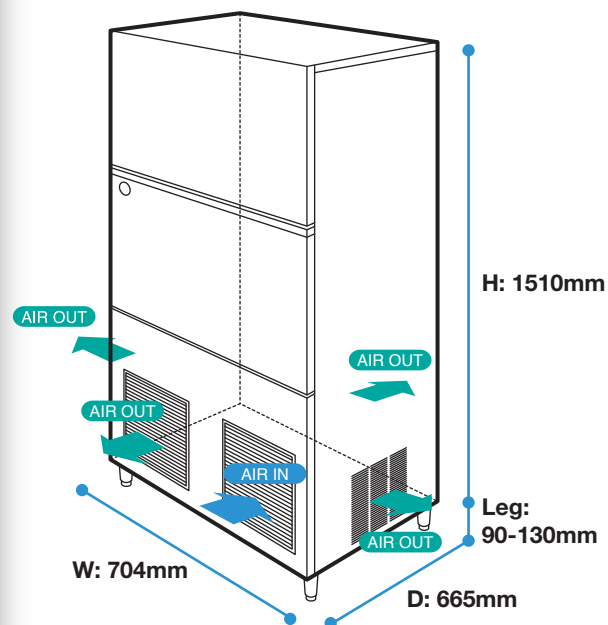

## BACK VIEW

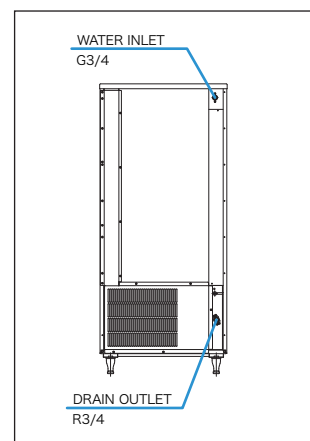

| MODEL NAME                                   |                   | IM-240NE                                         | IM-240NE-21         | IM-240NE-23         |
|----------------------------------------------|-------------------|--------------------------------------------------|---------------------|---------------------|
| ICE DIMENSIONS (MM) (W x D x H)              |                   | 28 x 28 x 32                                     | 21 x 21 x 14        | 28 x 28 x 23        |
| DIMENSIONS (MM) (W x D x H)                  |                   | Body : 704 x 665 x 1510 / Leg Height : 90-130 mm |                     |                     |
| PACKED DIMENSIONS (MM) (W x D x H)           |                   | 840 x 785 x 1695                                 | 805 x 760 x 1864    | 840 x 785 x 1695    |
| WEIGHT (NETT/GROSS)                          |                   | 111 KG / 122 KG                                  | 111 KG / 127 KG     | 111 KG / 122 KG     |
| AMPERAGE / STARTING AMPERAGE                 |                   | 6.6A / 35A                                       |                     |                     |
| ELECTRICAL CONSUMPTION                       |                   | 1320 W                                           |                     |                     |
| REFRIGERANT CHARGE                           |                   | R404a                                            |                     |                     |
| HEAT REJECTION (AT32°C/WT21°C)               |                   | 2870 W (2470 kcal/h)                             |                     |                     |
| ICE PRODUCTION<br>PER 24H (15MM)             | (AT10°C/WT10°C)   | 240 KG                                           | 217 KG (7mm)        | 225 KG              |
|                                              | (AT21°C/WT15°C)   | 230 KG                                           | 210 KG (7mm)        | 215 KG              |
|                                              | (AT32°C/WT21°C)   | 210 KG                                           | 190 KG (7mm)        | 195 KG              |
| WATER CONSUMPTION PER 24H<br>(AT21°C/WT15°C) |                   | 0.36 m <sup>3</sup>                              | 0.47 m <sup>3</sup> | 0.40 m <sup>3</sup> |
|                                              |                   | 1.6L / 1KG ICE                                   | 2.2L / 1KG ICE      | 1.9L / 1KG ICE      |
| ICE PRODUCTION<br>(AT21°C/WT15°C)            | FREEZE CYCLE TIME | 20 MIN                                           | 15 MIN              | 17 MIN              |
|                                              | PER CYCLE         | 3.2 KG / 140 PCS                                 | 2.1 KG / 360 PCS    | 2.38 KG / 140 PCS   |
| STORAGE CAPACITY                             |                   | 110 KG                                           |                     |                     |

### WARRANTY:

Two years parts & labour for entire unit, 3<sup>rd</sup> year on compressor only. Excluding door & exterior damages

### OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C  
• Water Supply: 5°-35°C / 0.07-0.8 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50 Hz  
\*60Hz units are available upon request