

NU 150 XSafe

Scotsman®

Ice Systems

Self Contained Ice Machine 85 kg

Item #:
Project:
Quantity:



FEATURES

- Front-in & front-out air flow: no need to leave space on the back.
- Resistant stainless steel exterior.
- High grade appearance.
- Front access condenser air filter: a do-it-yourself cleaning operation that saves time and money and makes your ice maker live longer.
- Ergonomic access to ice with sliding disappearing door: one touch door lift makes barman's life significantly easier.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Routine Maintenance visible alarm light on front panel.
- Built-in storage bin: allows undercounter installations for easier fit-in solution, specifically for coffee shops.
- XSafe: natural sanitation system, integrated inside the ice maker and operating automatically 24/7 to keep equipment clean & safe.



NU 150
Dice 10 g
W 22 x D 22 x H 22 mm



NU H 150
Half Dice 6 g
W 10 x D 22 x H 28 mm



NU L 150
Large Dice 15 g
W 28 x D 22 x H 28 mm

CONDENSING
SYSTEM

Air cooled
Water cooled

REFRIGERANT
GAS

R404A
R452A

VOLTAGE
V/Hz/ph

230/50/1

INTERNAL BIN
CAPACITY

20 kg

CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10	40
Water temperature	5	35
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

www.scotsman-ice.it
www.scotsman-ice.com

Self Contained Ice Machine 85 kg

10 December 2020

Self Contained Ice Machine 85 kg

NU 150 XSafe




Self Contained Ice Machine 85 kg

Item #:

Project:

Quantity:

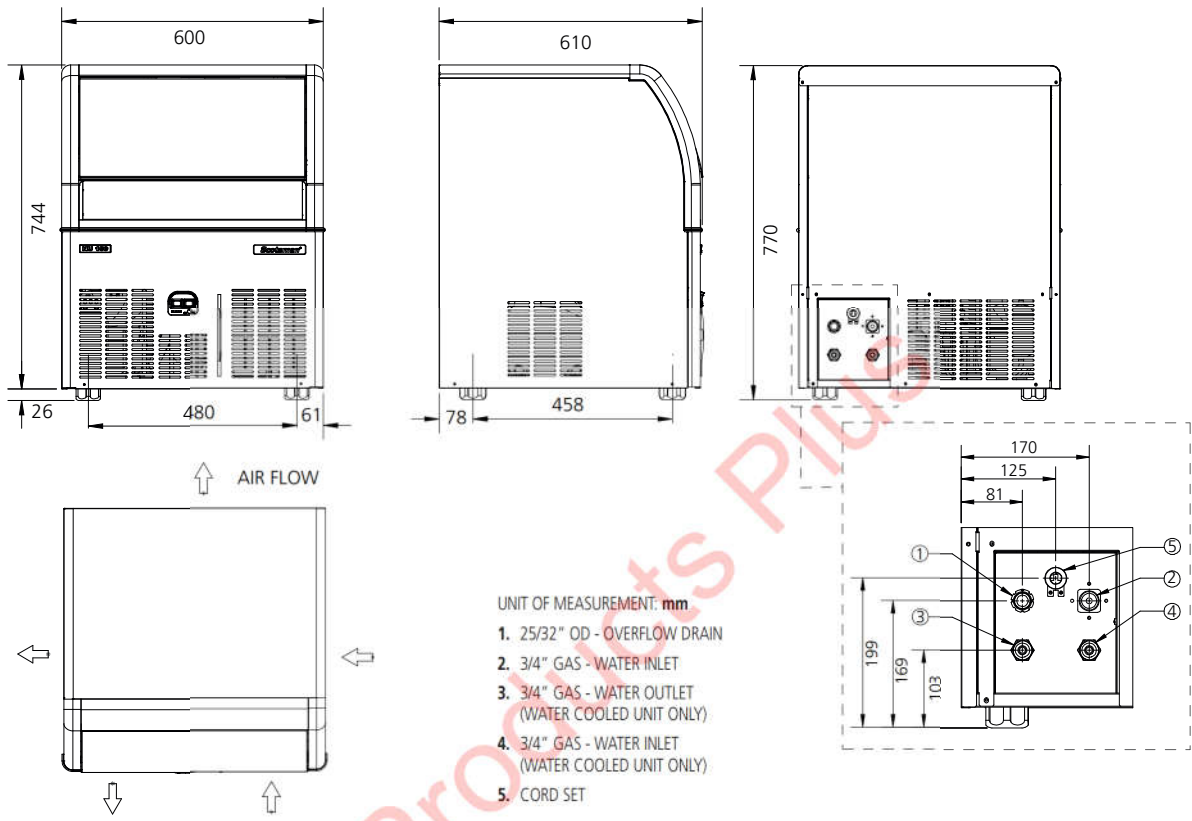

UNIT DATA				SHIPPING DATA				(*) Data refer to 32°C Amb. / 21°C Water temperature conditions			
Size (W x D x H)		600 x 610 x 770 mm		Carton (W x D x H)		670 x 680 x 920 mm					
Net weight		50 kg		Weight		62 kg					
		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/ 100 kg	kWh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NUH 150 AS	230/50/1	85	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUH 150 WS	230/50/1	85	70	70	10.8	7.6	52.7	500	990	3 x 1.5	10
NUL 150 AS	230/50/1	80	70	50	19.4	9.7	3.4	500	990	3 x 1.5	10
NUL 150 WS	230/50/1	80	70	65	10.8	7.0	48.9	500	990	3 x 1.5	10
NU 150 AS	230/50/1	85	68	48	18.7	9.0	3.3	500	990	3 x 1.5	10
NU 150 WS	230/50/1	85	80	70	10.8	7.6	52.7	500	990	3 x 1.5	10