

NW 1008

EASY

Scotsman
Ice Systems

Modular Ice Machine up to 485 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 1008
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 1008
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 1008
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
380/50/3N

RECOMMENDED BINS

Head	Bins		kg
NW 1008	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD	SB948	406
	CBT52EAMCD	SB1025	478
	●	UBH1100	553
	●	UBH1600	812

LEGEND:

✓ : Perfect combination between ice maker and bin
● : Ice chute cut-out performed upon installation
CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
Apple store
Google play
Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 485 kg

Modular Ice Machine up to 485 kg

NW 1008

EASY


Scotsman®
Ice Systems

Modular Ice Machine up to 485 kg

Item #:

Project:

Quantity:

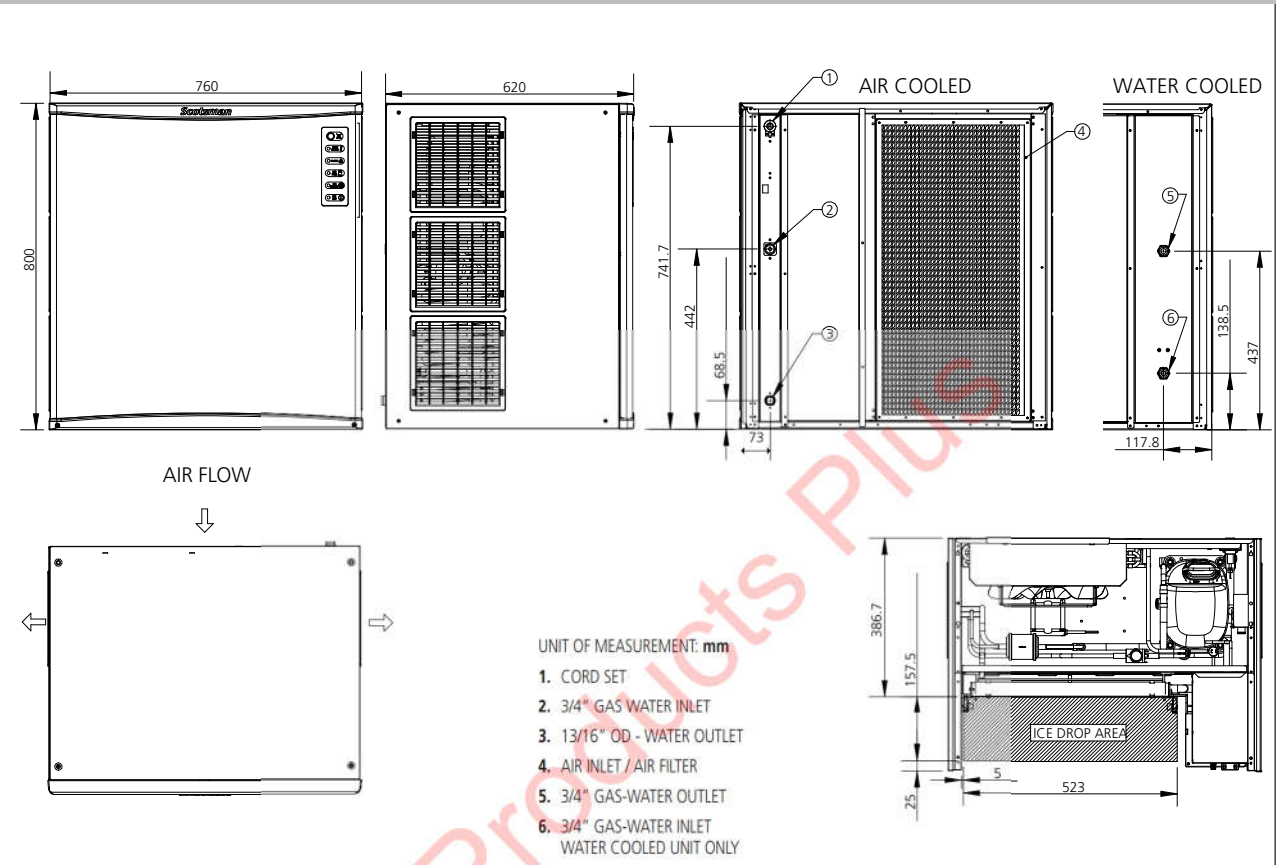

UNIT DATA				Compressor		Circuit wires		Max. fuse size
		Version	Voltage	Btu/h	W	No.	Ømm²	A
Size (W x D x H)	760 x 620 x 800 mm	NW 1008 AS	230/50/1	24909	7300	5	2.5	10
		NW 1008 AS	380/50/3N	24909	7300	5	2.5	10
Net weight	105 kg	NW 1008 ASR	230/50/1	0				
		NW 1008 ASR	380/50/3N	0				
SHIPPING DATA		NW 1008 WS	230/50/1	24909	7300	5	2.5	30
		NW H 1008 AS	230/50/1	24909	7300	5	2.5	10
Carton (W x D x H)	830 x 690 x 990 mm	NW H 1008 AS	380/50/3N	24909	7300	5	2.5	10
Weight	119 kg	NW H 1008 WS	230/50/1	0		5	2.5	10
		NW L 1008 AS	230/50/1	24909	7300	5	2.5	10
		NW L 1008 AS	380/50/3N	24909	7300	5	2.5	10
		NW L 1008 WS	230/50/1	0				

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 1008 AS	Air	230/50/1	480	460	380	13.9	52.8	24.4	2500
NW 1008 AS	Air	380/50/3N	480	460	380	13.9	52.8	24.4	2500
NW 1008 ASR	Remote	230/50/1	485	456	365				
NW 1008 ASR	Remote	380/50/3N	485	456	365				
NW 1008 WS	Water	230/50/1	450	445	395	12.1	48.0		2100
NW H 1008 AS	Air	230/50/1	460	450	380	13.9	52.8	24.4	2500
NW H 1008 AS	Air	380/50/3N	460	450	380	13.9	52.8	24.4	2500
NW H 1008 WS	Water	230/50/1							
NW L 1008 AS	Air	230/50/1	460	440	370	13.4	49.7	21.1	2500
NW L 1008 AS	Air	380/50/3N	460	440	370	13.4	49.7	21.1	2500
NW L 1008 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions