

NW 608

EASY

Scotsman
Ice Systems

Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:



FEATURES

- Vertical Cube System.
- T304 Stainless Steel Panels.
- Auto-alert Indicator Lights.
- Global standard footprint: strictly follows international imperial standards commonly adopted in the industry of reference.
- One touch cleaning: reduces labor costs and saves time and simplifies cleaning process.
- Front evaporator access: immediate access to the evaporating plate for quick self-maintenance operations.
- Stackable: add flexibility!
- Head only ice maker: requires a separate storage bin to collect the ice produced.



NW 608
Dice 10 g
L 22 x P 22 x H 22 mm



NW H 608
Half Dice 6 g
L 10 x P 22 x H 28 mm



NW L 608
Large Dice 15 g
L 28 x P 22 x H 28 mm

CONDENSING SYSTEM

Air cooled
Remote condenser
Water cooled

REFRIGERANT GAS

R404A

VOLTAGE V/Hz/ph

230/50/1
230/60/1

RECOMMENDED BINS

Head	Bins		kg
NW 608	✓	SB393	181
	✓	SB530	243
	CBT48EAMCD	SB948	406

LEGEND:

- ✓ : Perfect combination between ice maker and bin
 ● : Ice chute cut-out performed upon installation
 CBTxxxxxxx : need additional bin top

Certifications:



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	-10%	+10%

IMPORTANT NOTICE:

Models and specifications are subject to change without notice. This spec sheet is meant for commercial purpose only. For technical documentation please refer to our service manuals.

Download our free **App Scotsman Ice**
 Apple store
 Google play
 Windows store

DOWNLOAD

www.scotsman-ice.it
www.scotsman-ice.com

Modular Ice Machine up to 320 kg

NW 608

EASY


Scotsman®
Ice Systems

Modular Ice Machine up to 320 kg

Item #:

Project:

Quantity:

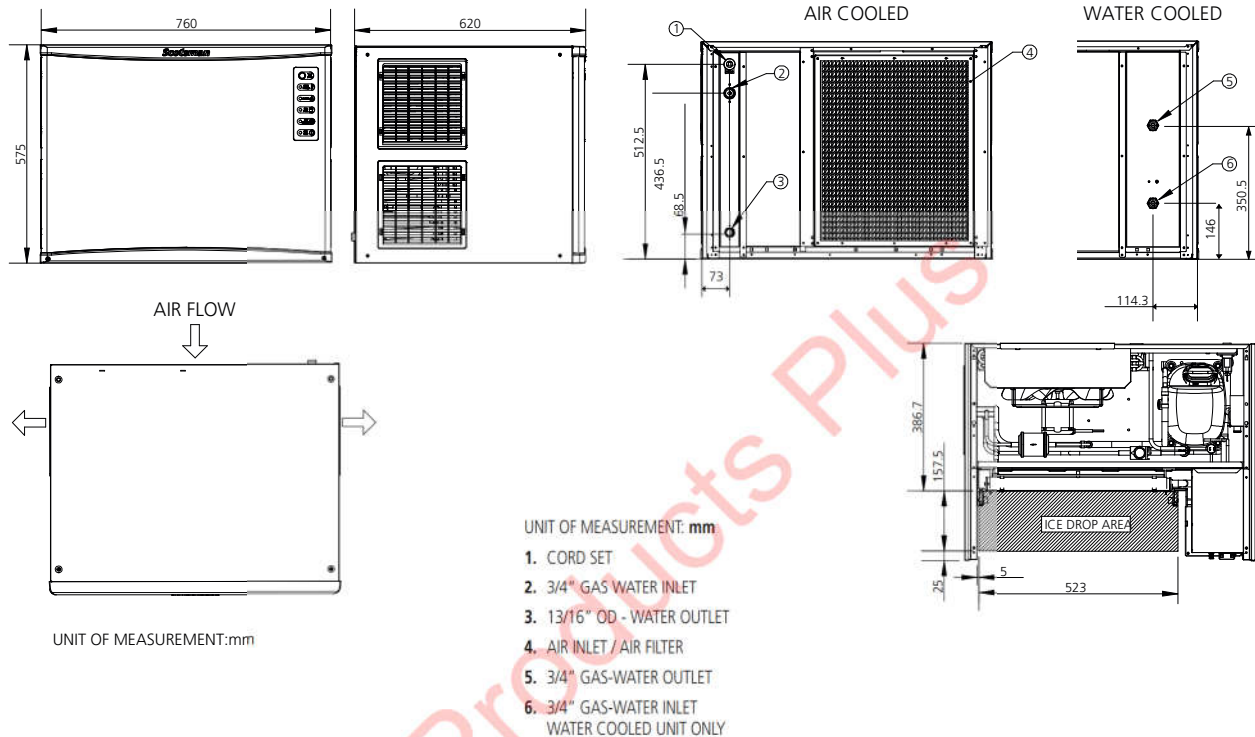

UNIT DATA

Size (W x D x H) 760 x 620 x 575 mm

Net weight 78 kg

SHIPPING DATA

Carton (W x D x H) 830 x 690 x 770 mm

Weight 92 kg

Version	Voltage	Compressor		Circuit wires		Max. fuse size	
		Btu/h	W	No.	Ømm²	A	
NW 608 AS	230/50/1	16549	4850	3	1.5	16	
NW 608 ASR	230/50/1	0					
NW 608 WS	230/50/1	0					
NW 608 AS	230/60/1	16549	4850	3	1.5	16	
NW H 608 AS	230/50/1	16549	4850	3	1.5	16	
NW H 608 AS	230/60/1	16549	4850	3	1.5	16	
NW H 608 ASR	230/50/1	0					
NW H 608 WS	230/50/1	0					
NW L 608 AS	230/50/1	16549	4850	3	1.5	16	
NW L 608 WS	230/50/1	0					

			24 h ice production kg °C Amb. / °C Water			Energy consumption*		Water usage*	Instant power
Version	Condensation	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kWh/100 kg	kWh/24h	l/h	W
NW 608 AS	Air	230/50/1	315	290	230	15.9	36.5	15.8	1600
NW 608 ASR	Remote	230/50/1							
NW 608 WS	Water	230/50/1							
NW 608 AS	Air	230/60/1							1600
NW H 608 AS	Air	230/50/1	320	290	225	15.0	33.7	16.5	1600
NW H 608 AS	Air	230/60/1							1600
NW H 608 ASR	Remote	230/50/1							
NW H 608 WS	Water	230/50/1							
NW L 608 AS	Air	230/50/1	310	285	210	16.5	34.7	14.5	1600
NW L 608 WS	Water	230/50/1							

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions