

NXW 708

Scotsman

Modular Ice Machine 350 kg

Item # :

Project :

Quantity :



FEATURES

- Energy & Water Consumption——Energy Star
- Refrigerant R410 / R290
- NSF and DOE fully compliant
- New built -in self-cleaning options: XSAFE (Option)
- Control - New hardware
- Easy Clean Ability
- Easy Service Ability
- New Core Evaporator
- New Water System
- New Design Scheme of Falling Ice
- New Design Water Pump
- New Water Level Controller
- New Water Distributor



NXW 708
Dice-10g
W22 xD22xH22 mm



NXW H 708
Half Dice-6g
W10 xD22xH28 mm



NXW L 708
Large Dice-15g
W28 xD22xH28 mm

CONDENSING SYSTEM

Air cooled

REFRIGERANT GAS

R410

VOLTAGE V/ Hz /ph

230/50/1

RECOMMENDED BINS

Head	Bins		kg
	✓	NB 193	129
NXW 708	CBT 30 EM CD	NB 393	178
	CBT 30 EM CD	NB 530	243

LEGEND:

- ✓ : Perfect combination between ice maker and bin
- : Ice chute cut-out performed upon installation



CERTIFICATIONS



OPERATING REQUIREMENTS

	Minimum	Maximum
Air temperature	10 °C	40 °C
Water temperature	5 °C	35 °C
Water pressure	1 bar (14 psi)	5 bar (70 psi)
Electrical voltage	- 10%	+10%

IMPORTANT NOTICE:
Models and specifications are subject to change without notice.
This spec sheet is meant for commercial purpose only.
For technical documentation please refer to our service manuals.

Down load our free **App Scotsman Ice**
Apple Store
Google play
Windows Store



www.scotsman-ice.it
www.scotsman-ice.com

NXW 708


Scotsman

Modular Ice Machine 350 kg

Item # :

Project :

Quantity :

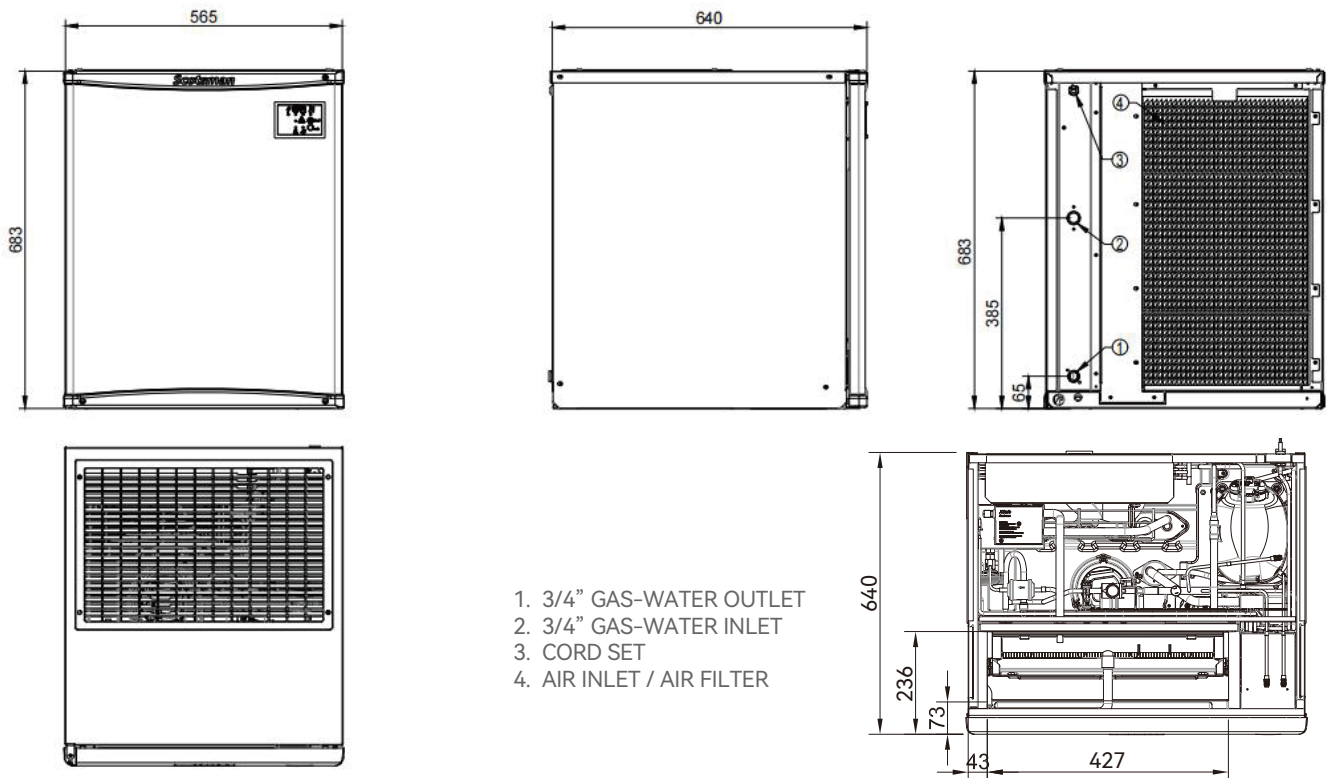

UNIT DATA

Size WxDxH 565 x 640 x 683 mm
Net weight 70 kg

SHIPPING DATA

Carton WxDxH 700 x 620 x 850 mm
Weight 82 kg

(*) Data refer to
32°C Amb. / 21°C Water
temperature conditions

		24 h ice production kg °C Amb. / °C Water			Energy consumption (*)		Water usage (*)	Instant power	Compressor	Circuit wires	Max. fuse size
Version	Voltage	10°C/10°C	21°C/10°C	32°C/21°C	kwh/ 100 kg	kwh/ 24h	l/h	W	W	No. x Ømm²	A
		kg	kg	kg							
NXW 708 AS	230/50/1	320	300	250	10.7	26.8	14.2	1150	4200	3 x 1.5	16
NXW H 708 AS	230/50/1	326	330	280	10.2	28.5	15.9	1150	4200	3 x 1.5	16
NXW L 708 AS	230/50/1	350	330	260	10.1	26.4	14.3	1150	4200	3 x 1.5	16

(*) Data refer to 32°C Amb. / 21°C Water temperature conditions

Milano Madrid Chicago Dubai Singapore Shanghai Johannesburg