



HOSHIZAKI



UNDERCOUNTER SERIES

depth 600mm				
refrigerator	> RT-96MA-S	> RT-126MA-S	> RT-156MA-S	> RT-186MA-S
freezer	> FT-96MA-S	> FT-126MA-S	> FT-156MA-S	> FT-186MA-S
depth 750mm				
refrigerator	> RT-98MA-S	> RT-128MA-S	> RT-158MA-S	> RT-188MA-S
freezer	> FT-98MA-S	> FT-128MA-S	> FT-158MA-S	> FT-188MA-S



HOSHIZAKI



REACH-IN SERIES

refrigerator	> HR-78MA-S	> HR-128MA-S	> HR-148MA-S	> HR-188MA-S
freezer	> HF-78MA-S	> HF-128MA-S	> HF-148MA-S	> HF-188MA-S
* combo	> HRF-78MA-S	> HRF-128MA-S	> HRF-148MA-S	> HRF-188MA-S

(*dual temperature in a single unit)



HOSHIZAKI



A-FIT SERIES

A-FIT FEATURES

- > efficient cooling with improved defrost system
- > special coating for a more durable evaporator
- > advanced electric controller with clear digital display
- > drain heater available

- > removable door gaskets
- > rounded edges for easy cleaning
- > automatic closing doors reduces energy consumption
- > adjustable legs
- > full height handle



- > pull out cassette compressor for easy maintenance (for undercounter units)




HOSHIZAKI A-FIT

In line with our focus on engineering refrigeration systems suitable for each market segment, the **A-FIT** series is designed for those who seek the basics. Simple in outlook yet uncompromising on cooling technologies; any **A-FIT** refrigerator, freezer and upright combination will provide an all-round efficiency.

A-FIT
SERIES
HOSHIZAKI
Refrigerator & Freezer




REFRIGERATOR & FREEZER (UNDERCOUNTER 600MM DEPTH)



- > REFRIGERATOR
RT-96MA-S
- > REFRIGERATOR
RT-126MA-S
- > REFRIGERATOR
RT-156MA-S
- > REFRIGERATOR
RT-186MA-S
- > FREEZER
FT-96MA-S
- > FREEZER
FT-126MA-S
- > FREEZER
FT-156MA-S
- > FREEZER
FT-186MA-S

REFRIGERATOR & FREEZER (UNDERCOUNTER 750MM DEPTH)




- > REFRIGERATOR
RT-98MA-S
- > REFRIGERATOR
RT-128MA-S
- > REFRIGERATOR
RT-158MA-S
- > REFRIGERATOR
RT-188MA-S
- > FREEZER
FT-98MA-S
- > FREEZER
FT-128MA-S
- > FREEZER
FT-158MA-S
- > FREEZER
FT-188MA-S


REFRIGERATOR & FREEZER (REACH-IN)




- > REFRIGERATOR
HR-78MA-S
- > FREEZER
HF-78MA-S

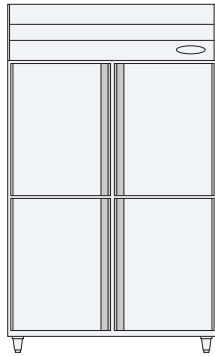

- > REFRIGERATOR
HR-128MA-S
- > FREEZER
HF-128MA-S

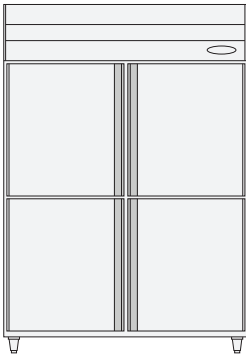

- > REFRIGERATOR
HR-148MA-S
- > FREEZER
HF-148MA-S

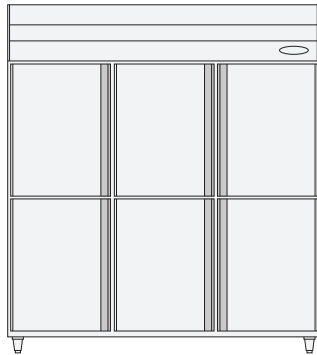


- > REFRIGERATOR
HR-188MA-S
- > FREEZER
HF-188MA-S


REFRIGERATOR & FREEZER (COMBO REACH-IN)




- > REFRIGERATOR & FREEZER
HRF-78MA-S

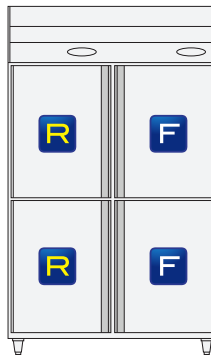

- > REFRIGERATOR & FREEZER
HRF-128MA-S

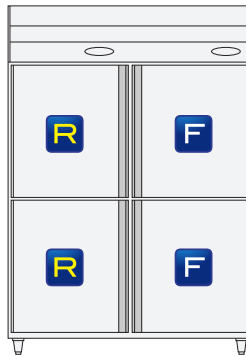

- > REFRIGERATOR & FREEZER
HRF-148MA-S

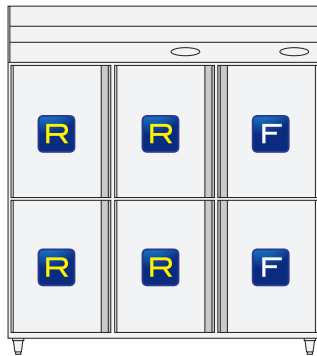

- > REFRIGERATOR & FREEZER
HRF-188MA-S



FREEZER



REFRIGERATOR

A-FIT
SERIES
Refrigerator

Reach-in Type

	HR-78MA-S	HR-128MA-S	HR-148MA-S	HR-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	410W	560W	610W	790W
STORAGE CAPACITY	600L	1110L	1310L	1720L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	130kg	152kg	203kg

- OPERATION CONDITIONS : Ambient Temperature 5℃~ 43℃ Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -2℃~-12℃

A-FIT
SERIES
Freezer

Reach-in Type

	HF-78MA-S	HF-128MA-S	HF-148MA-S	HF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	670W	1030W	1150W	1210W
STORAGE CAPACITY	600L	1100L	1300L	1710L
EXTERNAL DIMENSIONS	W700-D800-H2050mm	W1200-D800-H2050mm	W1400-D800-H2050mm	W1800-D800-H2050mm
NET WEIGHT	111kg	140kg	152kg	213kg

- OPERATION CONDITIONS : Ambient Temperature 5℃~ 43℃ Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

TEMPERATURE CONTROL: -23℃~-7℃

A-FIT
SERIES
Combo

Reach-in Type

	HRF-78MA-S	HRF-128MA-S	HRF-148MA-S	HRF-188MA-S
POWER SUPPLY	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz	1Phase 220-240V 50Hz
HEAT REJECTION	1030W	1140W	1140W	1320W
STORAGE CAPACITY	540L	908L	1100L	1523L
	REFRIGERATOR 260L	FREEZER 280L	REFRIGERATOR 454L	FREEZER 454L
EXTERNAL DIMENSIONS	W700-D800-H2050	W1200-D800-H2050	W1400-D800-H2050	W1800-D800-H2050
NETT WEIGHT	121kg	167kg	183kg	216kg

- OPERATION CONDITIONS : Ambient Temperature 5℃ ~ 43℃ Voltage Range: Rated Voltage ±6%
- Height Dimension Includes Leg Height Of 150mm

REFRIGERATOR TEMPERATURE CONTROL: -2℃~-12℃

FREEZER TEMPERATURE CONTROL: -23℃~-7℃