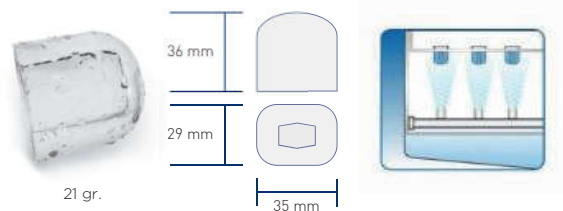


SDE 50

SIMAG

47 kg Self-contained Ice Machine

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220

Technical features											
• Stainless steel bodywork - scotch brite • Air or water cooled • Vertical pump • Main switch (ON/OFF) • Built-in cleaning system • Easily accessible components • Low power and water consumption • Optimum ratio between ice production and bin capacity • Reduced dimensions • Double defrosting system											
Internal bin capacity		Type of ice									
 17 kg of ice 810 cubes		Hollow Cubes  21 gr.									
Voltage		Machine dimensions									
230/50/1 Standard version 220-240/60/1 Available on demand		<table><tr><td>Net size WxDxH</td><td>485 x 575 x 810 mm</td></tr><tr><td>Net weight</td><td>45 kg</td></tr><tr><td>Shipping size WxDxH</td><td>550 x 640 x 840 mm</td></tr><tr><td>Shipping weight</td><td>53 kg</td></tr></table>		Net size WxDxH	485 x 575 x 810 mm	Net weight	45 kg	Shipping size WxDxH	550 x 640 x 840 mm	Shipping weight	53 kg
Net size WxDxH	485 x 575 x 810 mm										
Net weight	45 kg										
Shipping size WxDxH	550 x 640 x 840 mm										
Shipping weight	53 kg										
Technology and Certifications		<table><tr><td>MILANO OFFICE Sales Dept. Tel. +39 02 93900215 e-mail: sales@simag.it Service Dept. Tel. +39 02 93960357 e-mail: service@simag.it</td><td>SIMAG FAR EAST Singapore Office Tel. ++65 6738 5393 e-mail: scotsman@scotsman.com.sg</td></tr></table>		MILANO OFFICE Sales Dept. Tel. +39 02 93900215 e-mail: sales@simag.it Service Dept. Tel. +39 02 93960357 e-mail: service@simag.it	SIMAG FAR EAST Singapore Office Tel. ++65 6738 5393 e-mail: scotsman@scotsman.com.sg						
MILANO OFFICE Sales Dept. Tel. +39 02 93900215 e-mail: sales@simag.it Service Dept. Tel. +39 02 93960357 e-mail: service@simag.it	SIMAG FAR EAST Singapore Office Tel. ++65 6738 5393 e-mail: scotsman@scotsman.com.sg										
   		 www.simag.it									

SIMAG

Complete range: SDE 18 - SDE 24 - SDE 30 - SDE 34 - SDE 40 - SDE 50 - SDE 64 - SDE 84 - SDE 100 - SDE 170 - SDE 220



	Minimum	Maximum
Air temperature	10°C	43°C
Water temperature	5°C	38°C
Water pressure	1 bar	5 bar
Electrical voltage	-10 %	+10 %

Specifications and design are subject
to change without notice

Model	Voltage	Daily pro- duction kg	Power input Watt (*)	Refrigerant		Fuse A	Consumptions		
		10°C/10°C		Type	Charge kg		kWh/ 100kg	kWh/ 24h	Water l/h (**)
SDE 50 A	230/50/1	47	430	R134a	0.28	10	23.9	7.65	3.1
SDE 50 W	230/50/1	45	380	R134a	0.28	10	18.7	9.2	25.0
SDE 50 A	220/60/1	47	430	R134a	0.28	10	27.5	6.7	3.1
SDE 50 W	220/60/1	45	380	R134a	0.28	10	n.a.	n.a.	25.0
(*) Power Input: at 43°C Ambient Temperature									
(**) Water Consumption: at 32°C Air and 21°C Water									