



CRESCENT ICE MAKER SERIES




CRESCENT ICE MAKER

KMD-270AA

KMD-270AWA

Up to 270kg daily ice production capacity

Ice size



Crescent Ice Maker Features

- Clear Individual Crescent Ice
- Stainless Steel Evaporator



- New Audible Controller Board



-  Cycle saver design
-  Ever check alert system

- Easy cleaning



- Compact body size
- Noise level minimized down to 53db
- Water cooled available
- Compartmentalized design




Crescent Ice Maker
KMD-270AA

Allows installation
on 560mm(22'')wide
drink dispenser.



DIMENSIONS

KMD-270AA

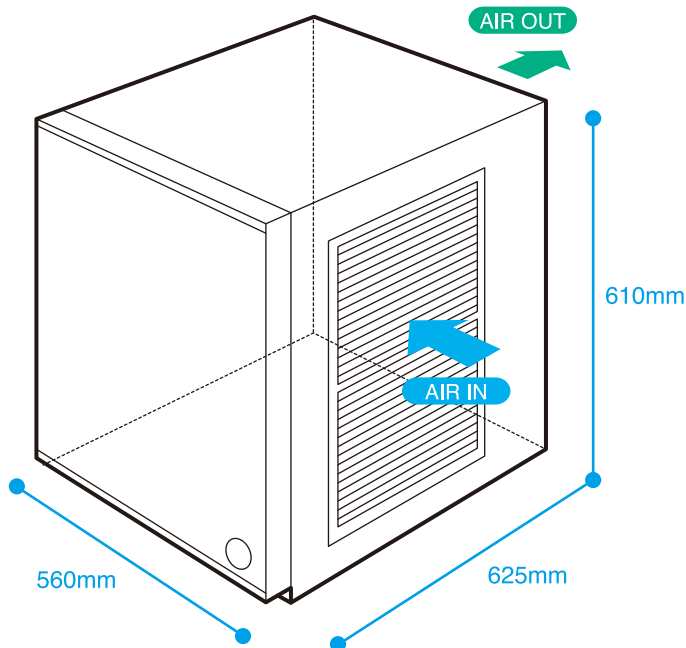

BACK SIDE

KMD-270AA

WATER INLET
1/2" FPT

WATER DRAIN
3/4" FPT

KMD-270AWA

WATER INLET
1/2" FPT

CONDENSER
WATER OUTLET
1/2" FPT

CONDENSER
WATER INLET
1/2" FPT

WATER DRAIN
3/4" FPT

SPECIFICATION

MODEL NAME		KMD-270AA	KMD-270AWA
AC SUPPLY VOLTAGE		1/220-240V/50Hz	1/220-240V/50Hz
DIMENSIONS(W x D x H)		560 x 625 x 610(mm)	560 x 625 x 610(mm)
AMPERAGE		4.9A	4.7A
STARTING AMPERAGE		24A	26A
ELECTRICAL CONSUMPTION		1030W	1075W
CONDENSER		Air - cooled	Water - cooled
REFRIGERANT CHARGE		R404a / 780g	R404a / 550g
WATER CONSUMPTION PER 24h (AT21°C / WT15°C)		0.54m ³ 2.2L / 1kg Ice	0.43m ³ 1.7L / 1kg Ice
ICE PRODUCTION PER 24h		265kg (AT10°C / WT10°C) 248kg (AT21°C / WT15°C) 221kg (AT32°C / WT21°C)	270kg (AT10°C / WT10°C) 260kg (AT21°C / WT15°C) 250kg (AT32°C / WT21°C)
ICE PRODUCTION (AT21°C/WT15°C)	FREEZE CYCLE TIME	30.2min	28min
	PER CYCLE	5.7kg / 624pcs	5.5kg / 624pcs
OPERATING CONDITIONS	VOLTAGE RANGE	198-254V	198-254V
	AMBIENT TEMP	7-40°C	7-40°C
	WATER SUPPLY	7-35°C / 0.07-0.8Mpa / 7.25 - 116 PSI	7-35°C / 0.07-0.8Mpa / 7.25 - 116 PSI
PACKAGE (W x D x H)		668 x 727 x 793(mm)	668 x 727 x 793(mm)
WEIGHT (NET / GROSS)		57kg / 73kg	59kg / 74kg

●Warranty : Two year parts and labour entire unit, 3rd year on compressor.

HOSHIZAKI

